
DT142





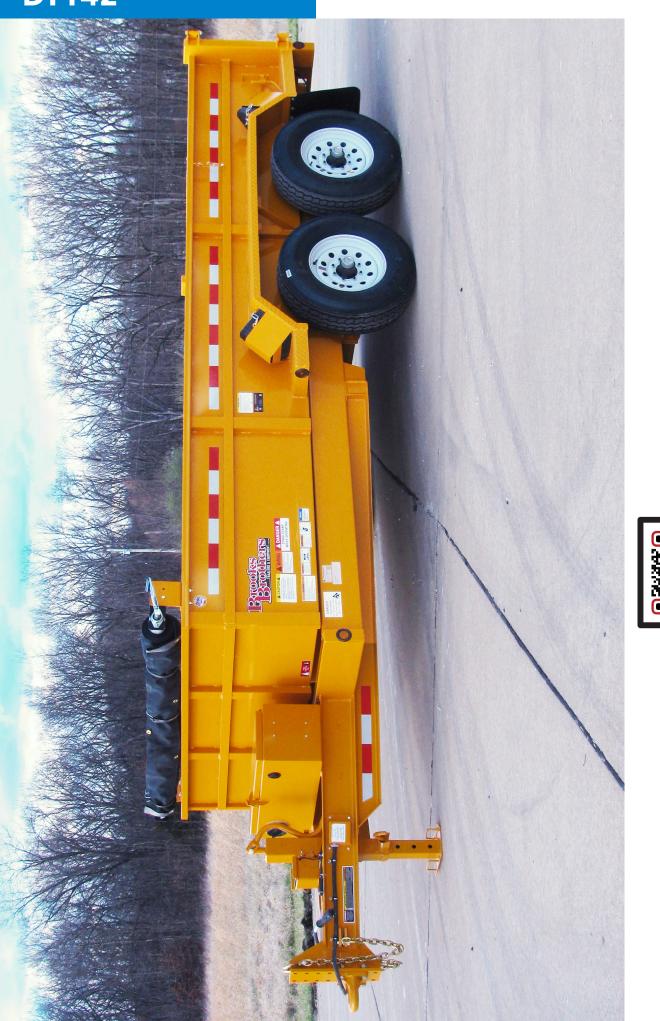

FOR NEW EQUIPMENT SALES, CALL 8 6 6 . 4 6 2 . 7 6 6 5 TO SPEAK WITH A REPRESENTATIVE or visit us online at brooksbrotherstrailers.com

DT142

FEATURES

- 50 Degree Dump Angle
- T-10 Scissor Hoist With Twin 5" Bore Lift Cylinders
- 12 Volt Electric Over Hydraulic Pump
- 7 Cubic Yard Volume
- 24" Low Profile Deck Height
- 6' Slide Out Ramps
- Roll Up Tarp
- Double Rear Gates With Cam Lock
- Steel Tube Main Frame Construction
- 6-Position Adjustable Hitch
- 3" Channel Crossmembers on 16" Centers
- (4) Floor Mounted D Rings
- 14 Ply Tires

SPECIFICATIONS		
	GVWR Range	16,000 - 18,000 lbs
	Payload Range	12,000 - 14,000 lbs
	Axle Manufacturer	Dexter
	Axle Size	7,000 - 8,000 lbs
	Tires	235 / 85R16 , 215 / 75R17.5
	Wheels	16" x 6" , 17.5" x 6.75"
	Overall Width	102"
	Overall Length	19'
	Jack	12,000 lb Drop Leg
	Cargo Bed Dimensions	14' L x 81" W x 24" H
	Hitch	2 5/16" Ball, 2 1/2" Lunette Eye, or 3" Lunette Eye
		*

OPTIONS

- Tandem 8,000 lbs Axle Upgrade
- Solar Charged Breakaway Kit
- Gas Engine Power Pack Upgrade
- Wireless Remote Upgrade

Additional accessories available through Brooks Brothers Trailers & Equipment including pulling grips, swivels, pilot line systems, and running grounds.

Philpip

ELECTRIC/HYDRAULIC POWER UNIT

SLIDE OUT RAMP



GASOLINE POWER UNIT



For more complete information on Brooks Brothers Trailers products and services, visit us on the web at www.brooksbrotherstrailers.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact a Brooks Brothers Trailers representative for all available options. Brooks Brothers Trailers and the Brooks Brothers Trailers logo are trademarks of Brooks Brothers Trailers in the United States and various other countries and may not be used without permission. Brooks Brothers Trailers and Equipment. All Rights Reserved.

